





Air-operated pumps for TRANSFER

Ratio 1:1 Flow rate 35 l/min



Air-operated pumps for short and medium-distance transfer.

Ideal for transferring low-medium viscosity fluids such as: oils, lubricants and similar products. The wall-mounted version of these pumps, mounted on wall or in a fixed position by means of the special accessories (refer to page 107), enables numerous uses through the application of modular extensions (refer to page 112).

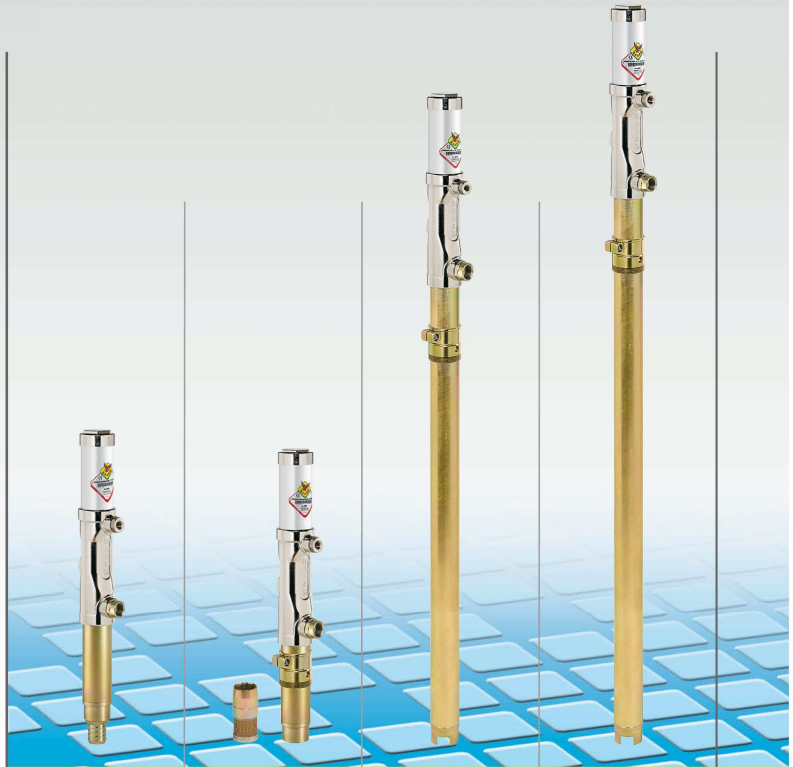

series 500

Article with seals in NBR				
Article with seals in VITON	26090	26091	26093	26094
Article with seals in TEFLON				

Compatible fluids	Oils, lubricants and similar			
Suction tube upper body	Aluminium			
Suction tube	Carbon steel			
Air inlet connection	bsp F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G
Fluid outlet connection	bsp F 3/4" G	F 3/4" G	F 3/4" G	F 3/4" G
Air working pressure	bar 6 - 8	6 - 8	6 - 8	6 - 8
Average air consumption	l/min 250	250	250	250
Noise level	dB 81	81	81	81
Max deliverable oil viscosity	SAE 80	80	80	80
Bung adaptor	-	standard	standard	standard

Suitable for drums or tanks



Packing	N° - m ³	1 - 0,010	1 - 0,010	1 - 0,020	1 - 0,020
Weight	Kg	5,5	6	7,2	7,2
Dimensions (A - B - C)	cm	33,2 - 20,8 - 5	33,2 - 16,8 - 5	33,2 - 74 - 5	33,2 - 94 - 5

